


Enorossi RP Mounted Rakes

The spring suspension system of the toolbar allows the raking wheels to adapt to any type of soil with the correct pressure without affecting the quality of the hay.

The 3 point hitch RP hay rake is extremely easy to operate. Raking wheels are mounted on the tapered roller bearings. The spring suspension system of the toolbar holder allows the raking wheels to adapt to any type of soil with the correct pressure without affecting the quality of the hay. Flexible steel teeth 7 mm. The selector on the toolbar allows for easy adjustment of working angle and width.

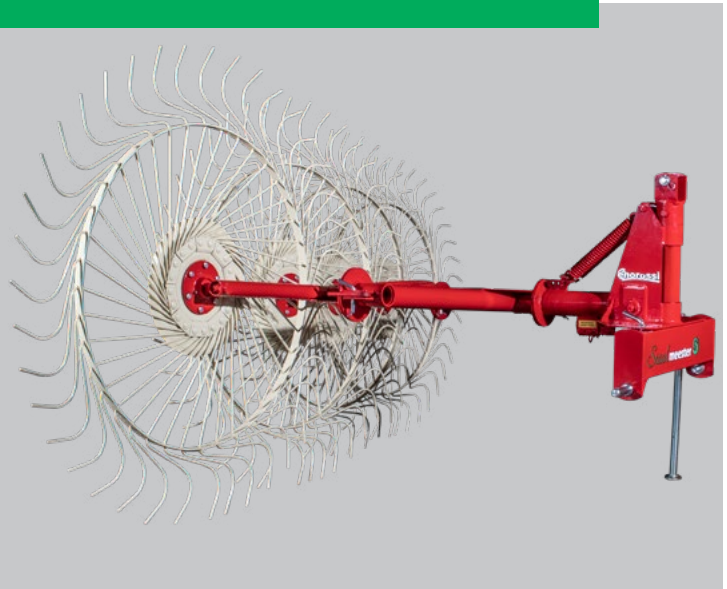

SPECIFICATIONS:

Frames made of FE 510 steel.

- Raking wheels made of C85 heat tempered steel to ensure stability and durability over time.
- Raking wheels Ø 140 cm, with central flange Ø 3.5 mm, n° 40 teeth Ø 7 mm.
- Raking wheel hubs made of spheroidal cast iron with grease zerk.
- Rake wheel arms with buttonhole to ease ground adaptation.
- Passage from raking position to transport position to be carried out manually.

Model:	Working Width Raking:	Weight:	No Raking Wheels:
RP 4	260 cm	178 kg	4
RP 5BS	340 cm	210 kg	5
RP 6BS	410 cm	250 kg	6